

Nexans INSTAPLEX™ CABLED CONDUCTORS

TWISTED TO SAVE YOU TIME AND MONEY!

Efficient


Reduces the amount of material handling required for installation and helps drive jobsite productivity.

Safe

Helps reduce potentially dangerous pulling tension and eliminates the need to manually identify conductor phasing.

Available

From stock in 8, 6, 3 & 3/0 AWG RW90 Cu in both 3-phase 3-wire, and 3-phase 4-wire configurations.

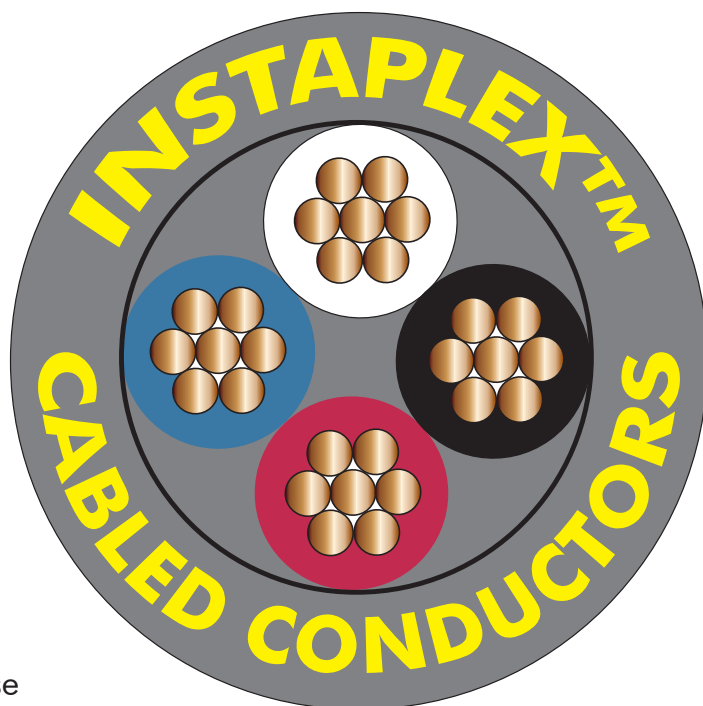

Part Number	Size AWG	No. of Conductors	Insulation Thickness		Approx. Overall Diameter		Approx. Net Cable Weight	
			mm	in	mm	in	kg/km	lbs/kft
604750	8 (7)	3	1.14	0.045	12.7	0.50	280	188
604752	8 (7)	4	1.14	0.045	14.2	0.56	373	251
604720	6 (7)	3	1.14	0.045	14.7	0.58	427	287
604719	6 (7)	4	1.14	0.045	16.5	0.65	569	383
604748	3 (7)	3	1.14	0.045	18.8	0.74	817	549
604749	3 (7)	4	1.14	0.045	21.1	0.83	1091	733
604754	3/0 (19)	3	1.40	0.055	30.2	1.20	2496	1677
604755	3/0 (19)	4	1.40	0.055	34.0	1.34	3331	2238

www.nexans.ca